



SAFETY CABLE INSTALLATION FOR USE ON HORIZONTAL TANK STRAPS

RAVEN[®]
industries, inc.

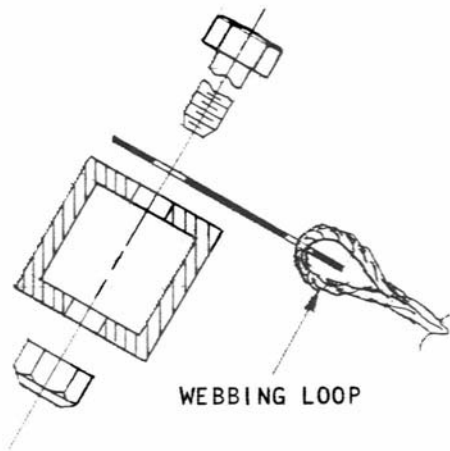


STEP 1:

DISCONNECT TANK STRAP FITTING
FROM FRAME.

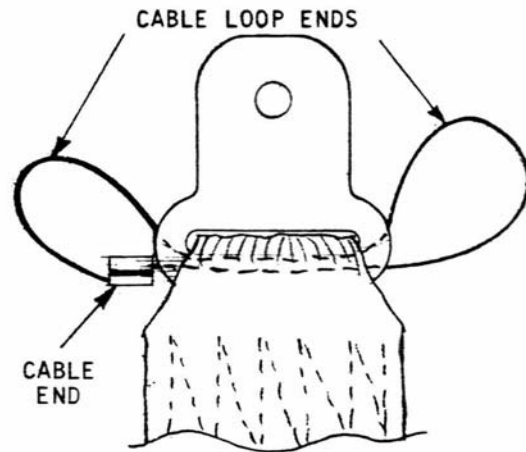


STEP 2:

PUSH SAFETY CABLE THROUGH WEB-
BING LOOP. LOCATE CABLE END
AS SHOWN. (THIS WAY IT WILL
NOT INTERFERE.)

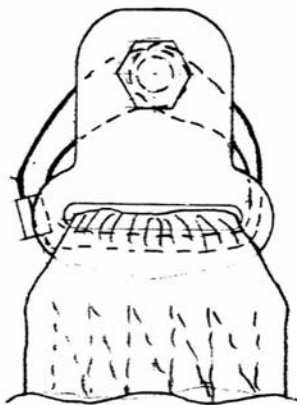

STEP 3:

INSERT BOLT THROUGH FITTING
HOLE AND CABLE LOOP ENDS.

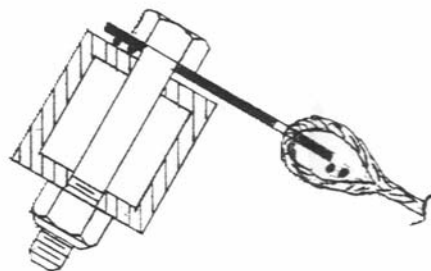

STEP 4:

REASSEMBLE TO FRAME AND
TIGHTEN.

FLUSH TO
EXPOSED

NICO-PRESS
FITTING

$\frac{1}{16}$ DIA CABLE
CUT LENGTH 8

